



# THE DATASHEET OF IR928-6C-F





## Technical Data Sheet

### 1.5mm Side Face Infrared LED

#### IR928-6C-F

#### Features

- High reliability
- High radiant intensity
- Peak wavelength  $\lambda_p=940\text{nm}$
- 2.54mm Lead spacing
- Low forward voltage
- Pb.Free
- This product itself will remain within RoHS compliant version.



#### Descriptions

- EVERLIGHT's Infrared Emitting Diode (IR928-6C-F) is a high intensity diode, molded in a water clear plastic package.
- The miniature side-facing device has a chip, that emits radiation from the side of the clear package.


#### Applications

- Mouse
- Optoelectronic switch
- Infrared applied system

#### Device Selection Guide

| LED Part No. | Chip     | Lens Color  |
|--------------|----------|-------------|
|              | Material |             |
| IR928-6C-F   | GaAlAs   | Water clear |

**Package Dimensions**

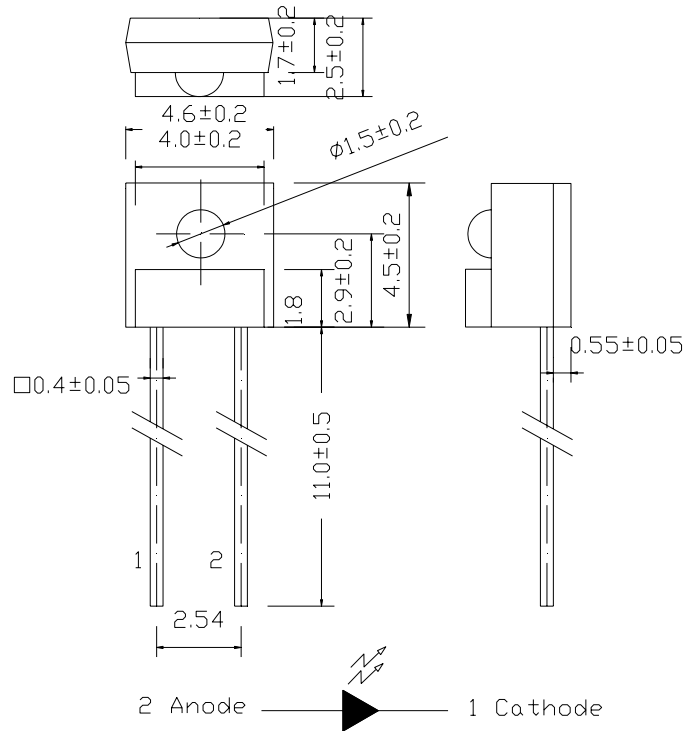

- Notes:** 1.All dimensions are in millimeters  
 2.Tolerances unless dimensions  $\pm 0.25\text{mm}$

**Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )**

| Parameter  | Symbol    | Rating    | Units            |
|--|-----------|-----------|------------------|
| Continuous Forward Current   | $I_F$     | 50        | mA               |
| Peak Forward Current(*1)   | $I_{FP}$  | 1.0       | A                |
| Reverse Voltage  | $V_R$     | 5         | V                |
| Operating Temperature  | $T_{opr}$ | -25 ~ +85 | $^\circ\text{C}$ |
| Storage Temperature  | $T_{stg}$ | -40 ~ +85 | $^\circ\text{C}$ |
| Soldering Temperature(*2)  | $T_{sol}$ | 260       | $^\circ\text{C}$ |
| Power Dissipation at(or below)<br>25 $^\circ\text{C}$ Free Air Temperature | $P_d$     | 75        | mW               |

- Notes:** \*1: $I_{FP}$  Conditions--Pulse Width  $\leq 100 \mu\text{s}$  and Duty  $\leq 1\%$ .  
 \*2:Soldering time  $\leq 5$  seconds.

**Electro-Optical Characteristics (Ta=25°C)**

| Parameter          | Symbol         | Condition                                  | Min. | Typ. | Max. | Units |
|--------------------|----------------|--|------|------|------|-------|
| Light Current      | Ic(ON)         | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V | 265  | --   | 1870 | μA    |
| Peak Wavelength    | λ <sub>p</sub> | I <sub>F</sub> =20mA                       | --   | 940  | --   | nm    |
| Spectral Bandwidth | Δλ             | I <sub>F</sub> =20mA                       | --   | 50   | --   | nm    |
| Forward Voltage    | V <sub>F</sub> | I <sub>F</sub> =20mA                       | --   | 1.2  | 1.5  | V     |
| Reverse Current    | I <sub>R</sub> | V <sub>R</sub> =5V                         | --   | --   | 10   | μA    |
| View Angle         | 2θ 1/2         | I <sub>F</sub> =20mA                       | --   | 40   | --   | deg   |

**Wide Rank**

| Parameter | Symbol | Min  | Max  | Unit | Test Condition                             |
|-----------|--------|------|------|------|--|
| 5-2       | Ic(ON) | 1053 | 1870 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| 6-1       | Ic(ON) | 650  | 1274 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| 6-2       | Ic(ON) | 465  | 750  | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| 7-1       | Ic(ON) | 347  | 550  | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| 7-2       | Ic(ON) | 306  | 441  | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| 7-3       | Ic(ON) | 265  | 358  | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |

**Thin Rank**

| Color Code | Ranks | Symbol | Min | Max | Unit | Test Condition                             |
|------------|-------|--------|-----|-----|------|--|
| Yellow     | E3    | Ic(ON) | 286 | 431 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| Silver     | E4    | Ic(ON) | 357 | 519 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| Green      | E5    | Ic(ON) | 428 | 608 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| Purple     | E6    | Ic(ON) | 500 | 696 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| White      | E7    | Ic(ON) | 571 | 784 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| Brown      | E8    | Ic(ON) | 643 | 872 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |
| Orange     | E9    | Ic(ON) | 714 | 960 | μA   | I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V |

**Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs. Ambient Temperature

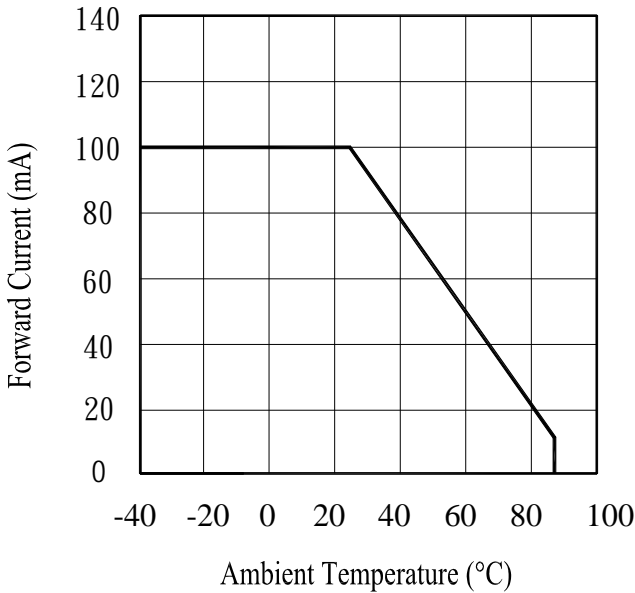


Fig.2 Spectral Distribution

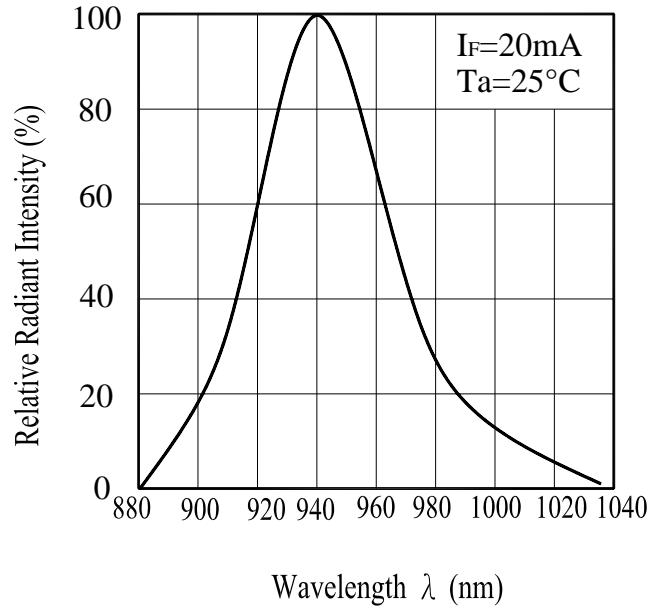


Fig.3 Peak Emission Wavelength vs. Ambient Temperature


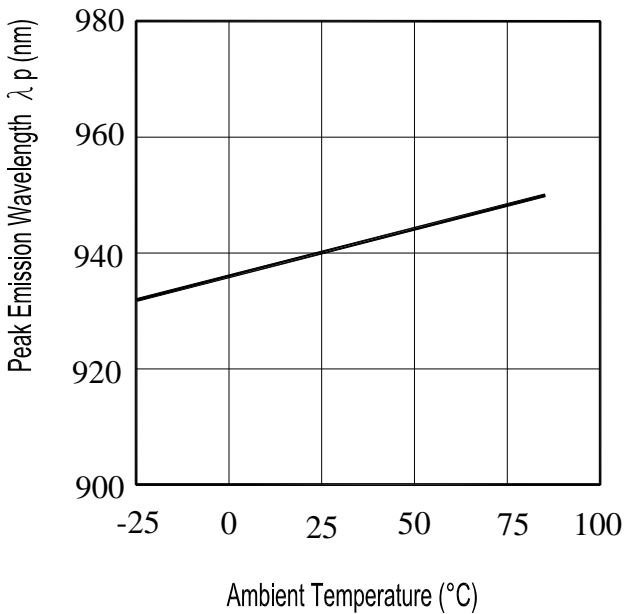


Fig.4 Forward Current vs. Forward Voltage

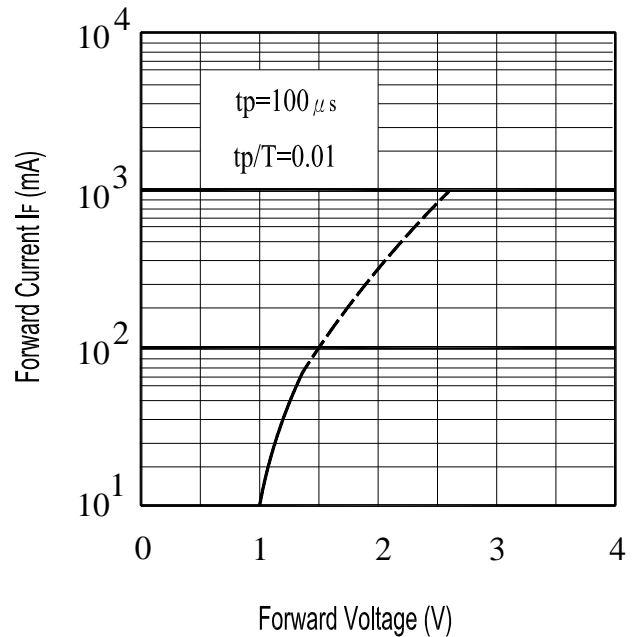

**Typical Electro-Optical Characteristics Curves**

Fig.5 Forward Voltage vs. Ambient Temperature


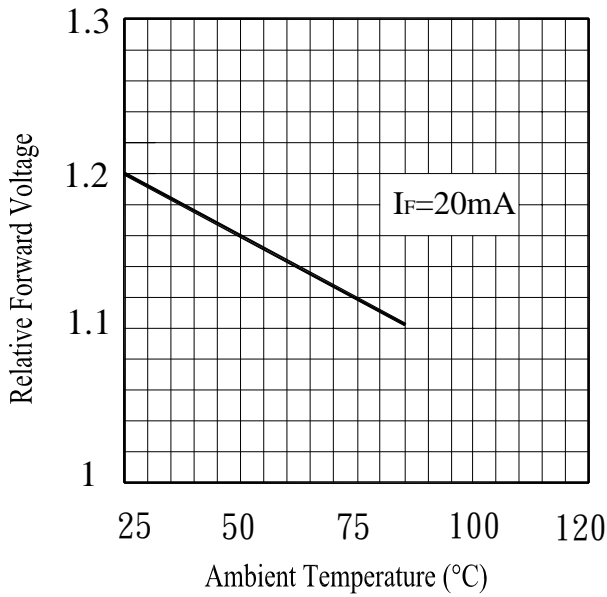



Fig.6 Relative Radiant Intensity vs. Angular Displacement

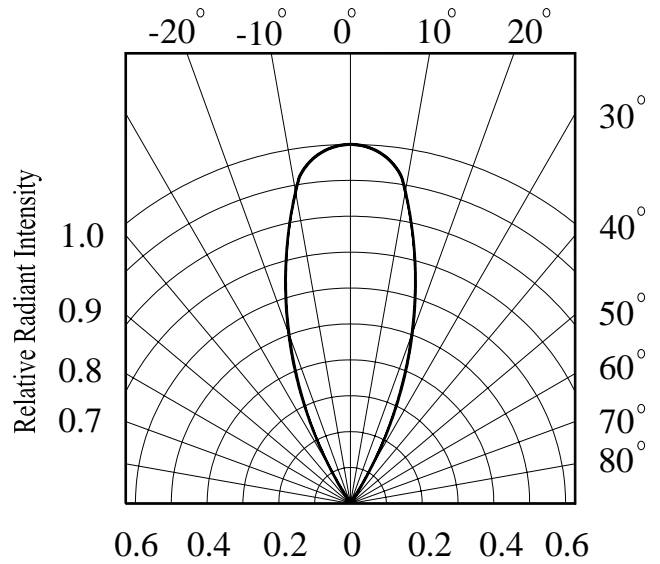

■ **Test Method For  $I_{C(ON)}$ :**

Condition:  $I_F=4mA, V_{CE}=3.5V$

The intensity testing method for infrared emitting diode

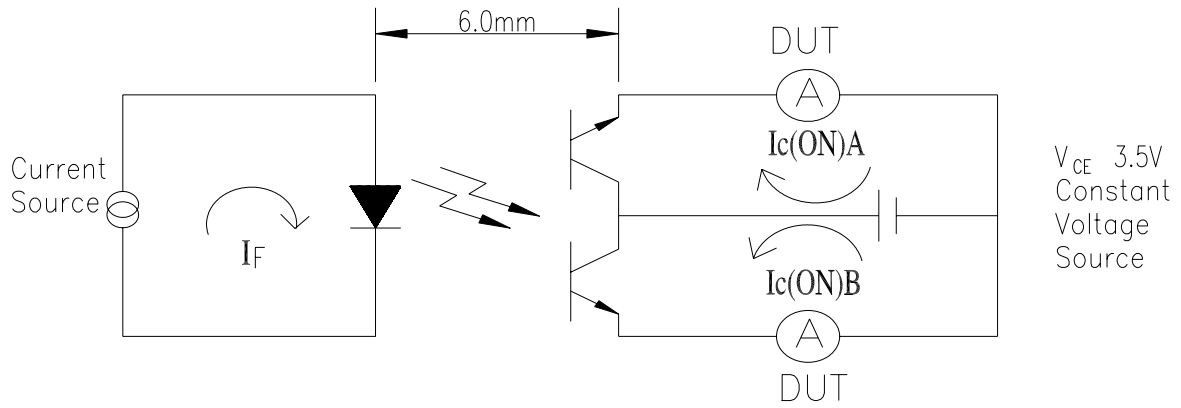





## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View IR928-6C-F on WIN SOURCE](#)
- [Everlight Electronics Co Ltd Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management