




**THE DATASHEET OF
CM3312R111R-10**



CM3312R111R-10

PHYSICAL DIMENSIONS:


A	8.50	[.335]	± 0.25	[.010]
B	3.05	[.120]	± 0.25	[.010]
C	2.36	[.093]	± 0.25	[.010]
D	1.14	[.045]	± 0.13	[.005]
E	0.58	[.023]	± 0.18	[.007]

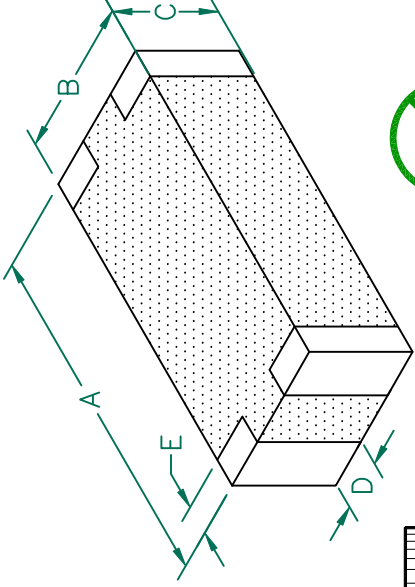


COMMON MODE ELECTRICAL CHARACTERISTICS	
COMMON MODE Z @ 100 MHz (Ω)	COMMON MODE Z @ 500 MHz (Ω)
Nominal	Nominal (F)
Minimum	Minimum
Maximum	Maximum

- NOTES: UNLESS OTHERWISE SPECIFIED:
- TAPED AND REELED PER MIL-STD-883C SPECIFICATIONS 13" REEL.
 - COMPONENTS SHOULD BE PREHEATED BEFORE SOLDERING.
 - U.S. PATENT 6,288,622.
 - TERMINATION FINISH IS 62/63.


Z vs. FREQUENCY (C,N,O)

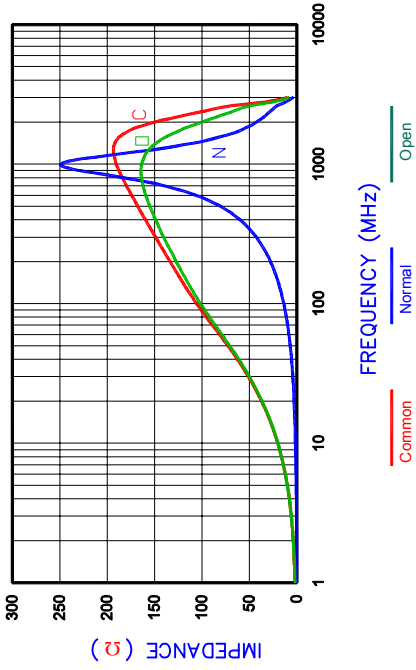


Z, R, XL vs. FREQUENCY

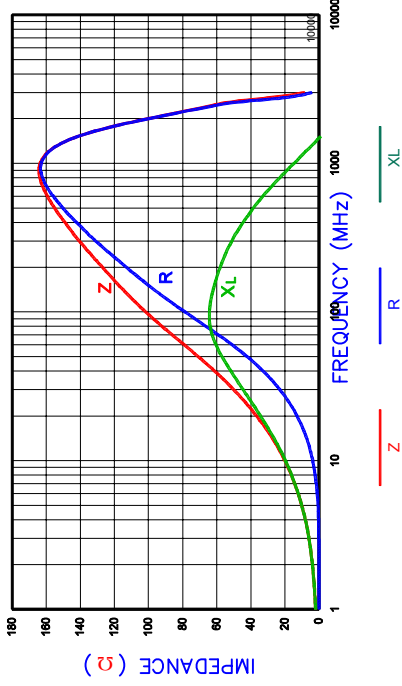

LAND PATTERNS FOR REFLOW SOLDERING

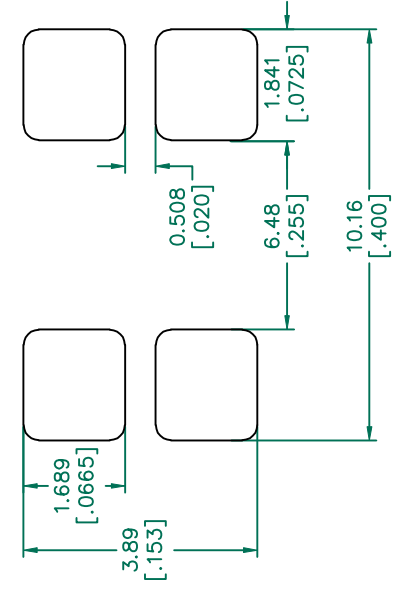

RECOMMENDED REFLOW SOLDERING PRE-HEATING

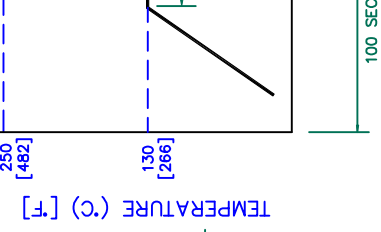

DURING AND AFTER SOLDERING OPERATION SOLDER MUST NOT BE ALLOWED TO BRIDGE CONTACTS. CONTACT SEPARATION MUST BE MAINTAINED.



DIMENSIONS ARE IN mm [INCHES].

REV	DESCRIPTION	DATE	INT
A	ORIGINAL DRAFT	07/27/05	JRK

RoHS Compliant

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CM3312R111R-10 on WIN SOURCE](#)
-  [Laird-Signal Integrity Products Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management